

Extreme Articles

Rory Zweistra

Oqapi Software



Overview

- What are Extreme Articles?
- Style your attachments
- Let your users decide (Simple version)
- Make full use of the paginator
- Examples / Questions?



What Are They?

- Uses self made templates
- Can make use of Javascript
- Can give the visitor more freedom
- Looks slick!



Lightbox Your Attachments

- Add the dependencies
- Create a new template
- Add attachments



Dependencies


- Prototype.js
- Scriptaculous.js
- Lightbox.js
- Lightbox.css

Lightbox2 package by Jesse



The Template

Article Namespace

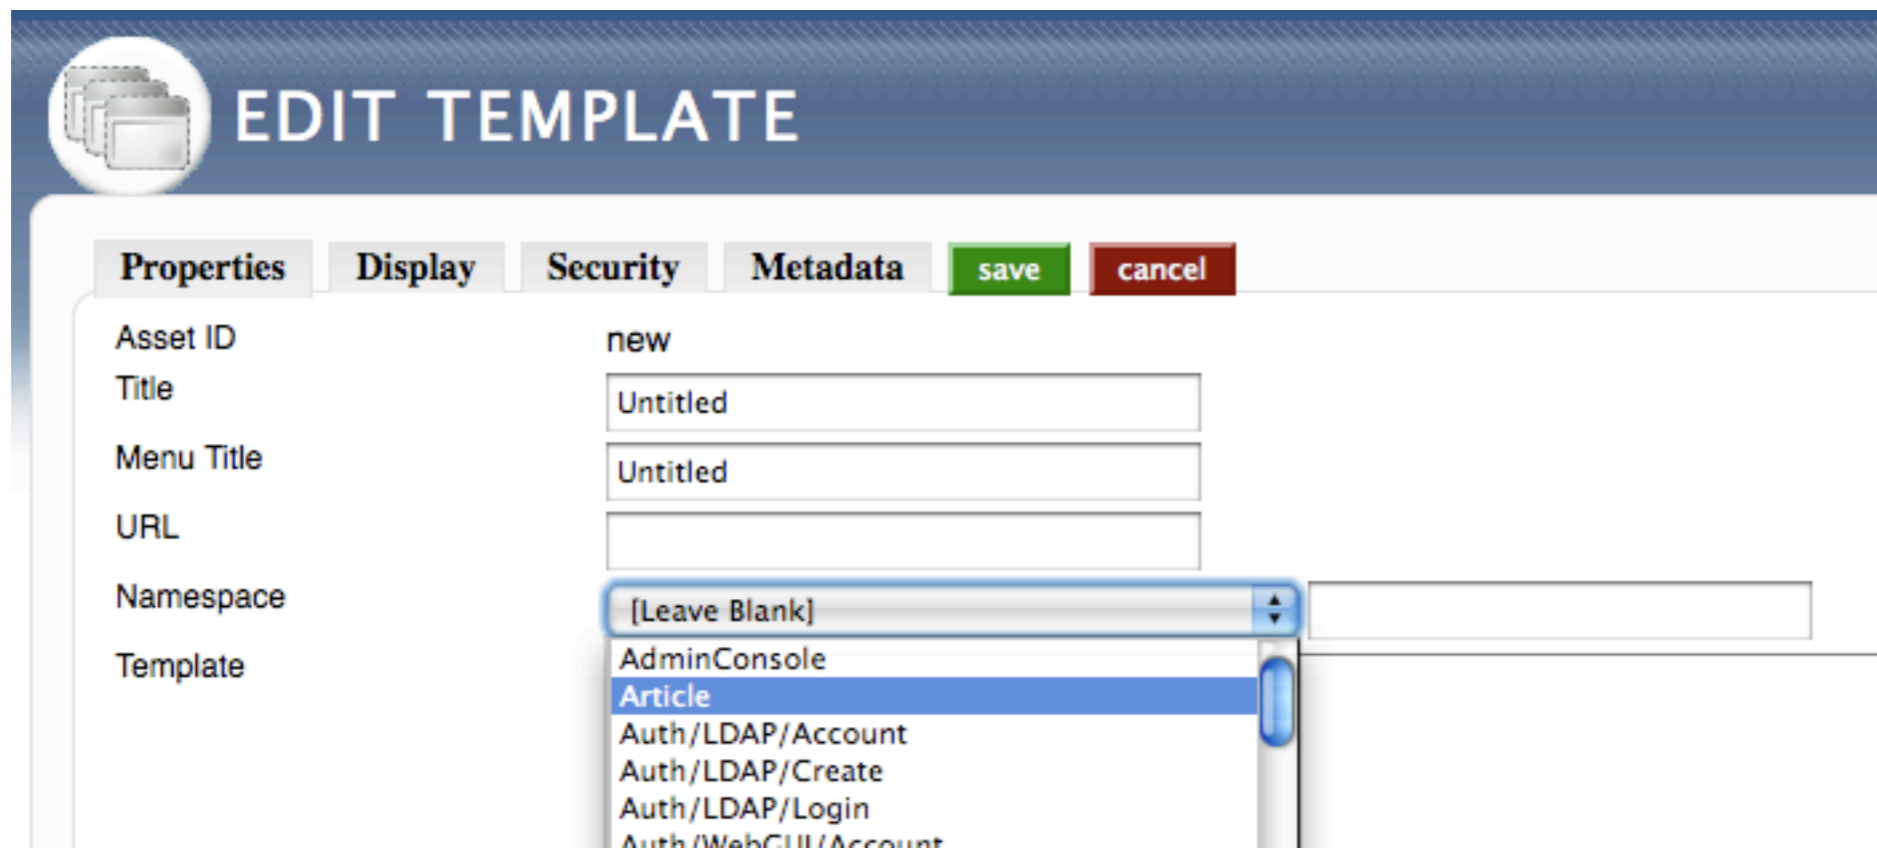

The screenshot shows a web interface titled "EDIT TEMPLATE" with a blue header bar. Below the header, there are tabs for "Properties", "Display", "Security", and "Metadata", along with "save" and "cancel" buttons. The "Properties" tab is active, showing a list of fields on the left and their corresponding values on the right. The "Namespace" field is highlighted, and a dropdown menu is open, showing options: "[Leave Blank]", "AdminConsole", "Article", "Auth/LDAP/Account", "Auth/LDAP/Create", "Auth/LDAP/Login", and "Auth/WebCall/Account". The "Article" option is selected.

Field	Value
Asset ID	new
Title	Untitled
Menu Title	Untitled
URL	
Namespace	[Leave Blank]
Template	



The Template

Add links to the dependencies

```
Head Block <script type="text/javascript" src="/styles/lightbox/js/prototype.js"></script>  
<script type="text/javascript" src="/styles/lightbox/js/scriptaculous.js?load=effects"></script>  
<script type="text/javascript" src="/styles/lightbox/js/lightbox.js"></script>  
<link rel="stylesheet" href="/styles/lightbox/css/lightbox.css" type="text/css" media="screen" />
```



The Template

...

```
<tmpl_if displayTitle>
  <h2><tmpl_var title></h2>
</tmpl_if>
```

```
<tmpl_if description>
  <tmpl_var description>
</tmpl_if>
```

```
<br /><br />
```

```
<tmpl_loop attachment_loop>
  <tmpl_if isImage>
    <a href="<tmpl_var url>" rel="lightbox[group]">
      " />
    </a>
  </tmpl_if>
</tmpl_loop>
```



The Template

...

```
<tmpl_if displayTitle>
  <h2><tmpl_var title></h2>
</tmpl_if>
```

```
<tmpl_if description>
  <tmpl_var description>
</tmpl_if>
```

```
<br /><br />
```

```
<tmpl_loop attachment_loop>
  <tmpl_if isImage>
    <a href="<tmpl_var url>" rel="lightbox[group]">
      " />
    </a>
  </tmpl_if>
</tmpl_loop>
```



The Template

...

```
<tmpl_if displayTitle>
  <h2><tmpl_var title></h2>
</tmpl_if>
```

```
<tmpl_if description>
  <tmpl_var description>
</tmpl_if>
```

```
<br /><br />
```

```
<tmpl_loop attachment_loop>
  <tmpl_if isImage>
    <a href="<tmpl_var url>" rel="lightbox[group]">
      " />
    </a>
  </tmpl_if>
</tmpl_loop>
```



The Template

...

```
<tmpl_if displayTitle>
  <h2><tmpl_var title></h2>
</tmpl_if>

<tmpl_if description>
  <tmpl_var description>
</tmpl_if>

<br /><br />

<tmpl_loop attachment_loop>
  <tmpl_if isImage>
    <a href="<tmpl_var url>" rel="lightbox[group]">
      " />
    </a>
  </tmpl_if>
</tmpl_loop>
```



The Result

Extreme Articles

Lightbox your attachments

This article contains some attachments (pic



[Logout](#) [rory](#) [Home](#) [Turn Admin On!](#)



will be presented to the visitor in a Light

Let The User Decide

- Create a new template
- Add a Javascript function



The Template

```
<a href="#" onclick="showHide('10words');">
    10 words
</a>
&bull;
<a href="#" onclick="showHide('words');">
    100 words
</a>

...

<div id="10words" style="display: block;">
    <tmpl_var description.first.10words>...
</div>

<div id="words" style="display: none;">
    <tmpl_var description.first.100words>
</div>
```



The Template

```
<a href="#" onclick="showHide('10words');">
    10 words
</a>
&bull;
<a href="#" onclick="showHide('words');">
    100 words
</a>

...

<div id="10words" style="display: block;">
    <tmpl_var description.first.10words>...
</div>

<div id="words" style="display: none;">
    <tmpl_var description.first.100words>
</div>
```



The Template

```
<a href="#" onclick="showHide('10words');">
    10 words
</a>
&bull;
<a href="#" onclick="showHide('words');">
    100 words
</a>

...

<div id="10words" style="display: block;">
    <tmpl_var description.first.10words>...
</div>

<div id="words" style="display: none;">
    <tmpl_var description.first.100words>
</div>
```



The Template

```
<a href="#" onclick="showHide('10words');">
    10 words
</a>
&bull;
<a href="#" onclick="showHide('words');">
    100 words
</a>

...

<div id="10words" style="display: block;">
    <tmpl_var description.first.10words>...
</div>

<div id="words" style="display: none;">
    <tmpl_var description.first.100words>
</div>
```



The Template

```
<a href="#" onclick="showHide('10words');">
    10 words
</a>
&bull;
<a href="#" onclick="showHide('words');">
    100 words
</a>

...

<div id="10words" style="display: block;">
    <tmpl_var description.first.10words>...
</div>

<div id="words" style="display: none;">
    <tmpl_var description.first.100words>
</div>
```



The Template

```
<a href="#" onclick="showHide('10words');">
    10 words
</a>
&bull;
<a href="#" onclick="showHide('words');">
    100 words
</a>

...

<div id="10words" style="display: block;">
    <tmpl_var description.first.10words>...
</div>

<div id="words" style="display: none;">
    <tmpl_var description.first.100words>
</div>
```



Add Javascript

```
<script type="text/javascript" language="javascript">  
  
function showHide(id) {  
  
    document.getElementById('10words').style.display = "none";  
    document.getElementById('words').style.display = "none";  
    document.getElementById('sentences').style.display = "none";  
    document.getElementById('description').style.display = "none";  
  
    document.getElementById(id).style.display = "block";  
  
}  
  
</script>
```



Add Javascript

```
<script type="text/javascript" language="javascript">  
  
function showHide(id) {  
  
    document.getElementById('10words').style.display = "none";  
    document.getElementById('words').style.display = "none";  
    document.getElementById('sentences').style.display = "none";  
    document.getElementById('description').style.display = "none";  
  
    document.getElementById(id).style.display = "block";  
  
}  
  
</script>
```



Add Javascript

```
<script type="text/javascript" language="javascript">  
  
function showHide(id) {  
  
    document.getElementById('10words').style.display = "none";  
    document.getElementById('words').style.display = "none";  
    document.getElementById('sentences').style.display = "none";  
    document.getElementById('description').style.display = "none";  
  
    document.getElementById(id).style.display = "block";  
  
}  
  
</script>
```



Add Javascript

```
<script type="text/javascript" language="javascript">  
  
function showHide(id) {  
  
    document.getElementById('10words').style.display = "none";  
    document.getElementById('words').style.display = "none";  
    document.getElementById('sentences').style.display = "none";  
    document.getElementById('description').style.display = "none";  
  
    document.getElementById(id).style.display = "block";  
  
}  
  
</script>
```



Add Javascript

```
<script type="text/javascript" language="javascript">  
  
function showHide(id) {  
  
    document.getElementById('10words').style.display = "none";  
    document.getElementById('words').style.display = "none";  
    document.getElementById('sentences').style.display = "none";  
    document.getElementById('description').style.display = "none";  
  
    document.getElementById(id).style.display = "block";  
  
}  
  
</script>
```



The Result

Let the user decide

So much to read, so little time

[10 words](#) • [100 words](#) • [4 sentences](#) • [Description](#)

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Integer ...

Let the user decide

So much to read, so little time

[10 words](#) • [100 words](#) • [4 sentences](#) • [Description](#)

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Integer gravida nunc non quam. Nulla et turpis. Nulla tristique, purus a aliquet tristique, libero libero volutpat elit, vel tincidunt tellus risus tincidunt elit. Maecenas turpis lorem, elementum ut, imperdiet et, fringilla ut, tellus. Nullam tellus elit, hendrerit vel, gravida eget, sollicitudin pellentesque, tellus. Sed rhoncus. Aliquam erat volutpat. Vestibulum ac nisi eget pede semper aliquam. Donec nisi. Suspendisse tempus, velit quis pellentesque tincidunt, ipsum massa vestibulum massa, a imperdiet est mauris nec justo. Nulla pretium vehicula pede. Sed a mauris. Donec nec lectus. Nunc bibendum. Sed at purus. Nunc congue



Multi- Page/Template Articles

- Create templates
- Paginate your article



Create The Template Links

```
<a href="
  <tmpl_var new.template>ko2hz2XkQp8NUqR8qUgTfw;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>
">
  Layout 1
</a>
```

```
&bull;
<a href="<tmpl_var new.template>
  I1lgo_r2Mi6I4ZHUZNfy2w;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>">
  Layout 2
</a>
```

...



Create The Template Links

```
<a href="
  <tmpl_var new.template>ko2hz2XkQp8NUqR8qUgTfw;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>
">
  Layout 1
</a>
```

```
&bull;
<a href="<tmpl_var new.template>
  I1lgo_r2Mi6I4ZHUZNfy2w;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>">
  Layout 2
</a>
```

...



Create The Template Links

```
<a href="
  <tmpl_var new.template>ko2hz2XkQp8NUqR8qUgTfw;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>
">
  Layout 1
</a>

&bull;
<a href="<tmpl_var new.template>
  I1lgo_r2Mi6I4ZHUZNfy2w;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>">
  Layout 2
</a>

...
```



Create The Template Links

```
<a href="
  <tmpl_var new.template>ko2hz2XkQp8NUqR8qUgTfw;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>
">
  Layout 1
</a>
```

```
&bull;
<a href="<tmpl_var new.template>
  I1lgo_r2Mi6I4ZHUZNfy2w;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>">
  Layout 2
</a>
```

...



Create The Template Links

```
<a href="
  <tmpl_var new.template>ko2hz2XkQp8NUqR8qUgTfw;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>
">
  Layout 1
</a>
```

```
&bull;
<a href="<tmpl_var new.template>
  I1lgo_r2Mi6I4ZHUZNfy2w;
  <tmpl_if pagination.pageCount.isMultiple>
    pn=<tmpl_var pagination.pageNumber>
  </tmpl_if>">
  Layout 2
</a>
```

...



Create The Paginator

...

```
<tmpl_var description>

<tmpl_if pagination.pageCount.isMultiple>
  <tmpl_loop pagination.pageLoop>
    <a href="
      <tmpl_var pagination.url>
      ;func=view;
      overrideTemplateId=<tmpl_var session.form.overrideTemplateId>
    ">
      <tmpl_var pagination.text>
    </a>
  </tmpl_loop>
</tmpl_if>
```



Create The Paginator

...

```
<tmpl_var description>

<tmpl_if pagination.pageCount.isMultiple>
  <tmpl_loop pagination.pageLoop>
    <a href="
      <tmpl_var pagination.url>
      ;func=view;
      overrideTemplateId=<tmpl_var session.form.overrideTemplateId>
    ">
      <tmpl_var pagination.text>
    </a>
  </tmpl_loop>
</tmpl_if>
```



Create The Paginator

...

```
<tmpl_var description>

<tmpl_if pagination.pageCount.isMultiple>
  <tmpl_loop pagination.pageLoop>
    <a href="
      <tmpl_var pagination.url>
      ;func=view;
      overrideTemplateId=<tmpl_var session.form.overrideTemplateId>
    ">
      <tmpl_var pagination.text>
    </a>
  </tmpl_loop>
</tmpl_if>
```



Create The Paginator

...

```
<tmpl_var description>

<tmpl_if pagination.pageCount.isMultiple>
  <tmpl_loop pagination.pageLoop>
    <a href="
      <tmpl_var pagination.url>
      ;func=view;
      overrideTemplateId=<tmpl_var session.form.overrideTemplateId>
    ">
      <tmpl_var pagination.text>
    </a>
  </tmpl_loop>
</tmpl_if>
```



Create The Paginator

...

```
<tmpl_var description>

<tmpl_if pagination.pageCount.isMultiple>
  <tmpl_loop pagination.pageLoop>
    <a href="
      <tmpl_var pagination.url>
      ;func=view;
      overrideTemplateId=<tmpl_var session.form.overrideTemplateId>
    ">
      <tmpl_var pagination.text>
    </a>
  </tmpl_loop>
</tmpl_if>
```



Create The Paginator

...

```
<tmpl_var description>

<tmpl_if pagination.pageCount.isMultiple>
  <tmpl_loop pagination.pageLoop>
    <a href="
      <tmpl_var pagination.url>
        ;func=view;
      overrideTemplateId=<tmpl_var session.form.overrideTemplateId>
    ">
      <tmpl_var pagination.text>
    </a>
  </tmpl_loop>
</tmpl_if>
```



Create The Paginator

...

```
<tmpl_var description>

<tmpl_if pagination.pageCount.isMultiple>
  <tmpl_loop pagination.pageLoop>
    <a href="
      <tmpl_var pagination.url>
      ;func=view;
      overrideTemplateId=<tmpl_var session.form.overrideTemplateId>
    ">
      <tmpl_var pagination.text>
    </a>
  </tmpl_loop>
</tmpl_if>
```



Create The Paginator

...


```
<tmpl_var description>

<tmpl_if pagination.pageCount.isMultiple>
  <tmpl_loop pagination.pageLoop>
    <a href="
      <tmpl_var pagination.url>
      ;func=view;
      overrideTemplateId=<tmpl_var session.form.overrideTemplateId>
    ">
      <tmpl_var pagination.text>
    </a>
  </tmpl_loop>
</tmpl_if>
```



Add Pagination Marks

^-;

 **EDIT ARTICLE**

Properties | **Display** | **Security** | **Metadata** | **save** | **cancel**

Asset ID	tod2O4nJ2OdFTMV5r1tmUw
Title	<input type="text" value="Long text"/>
Menu Title	<input type="text" value="Long text"/>
URL	<input type="text" value="root/pagination/long-text"/>
Description	<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut odio. Nam sed est. Nam a risus et est iaculis adipiscing. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Integer ut justo. In tincidunt viverra nisl. Donec dictum malesuada magna. Curabitur id nibh auctor tellus adipiscing pharetra. Fusce vel justo non orci semper feugiat. Cras eu leo at purus ultrices tristique.</p> <p>^-;</p>



And Yet Another Result

THIS IS THE FIRST LAYOUT! On page: 4 [Layout 1](#) • [Layout 2](#)

Nam liber tempor cum soluta nobis eleifend option congue nihil imperdiet doming id quod mazim placerat facer possim assum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim veniam, quis nostrud exerci tation ullamcorper suscipit lobortis nisl ut aliquip ex ea commodo consequat.

[1](#) [2](#) [3](#) [4](#) [5](#) [6](#)

THIS IS THE SECOND LAYOUT! On page: 4 [Layout 1](#) • [Layout 2](#) • Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut odio.

Nam liber tempor cum soluta nobis eleifend option congue nihil imperdiet doming id quod mazim placerat facer possim assum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim veniam, quis nostrud exerci tation ullamcorper suscipit lobortis nisl ut aliquip ex ea commodo consequat.

[1](#) [2](#) [3](#) [4](#) [5](#) [6](#)



Time For Some More Examples And Questions?

